

# Li-Lo

## FLAT RAINWATER TANK

**The Li-Lo tankseries**



**2 friends**



**2 shovels**



**1 morning**


# How do you install a tank? I know!

It's as easy as 1, 2, 3.



75 % less digging compared with a concrete cistern.

Save more than 100 wheelbarrow loads of soil!

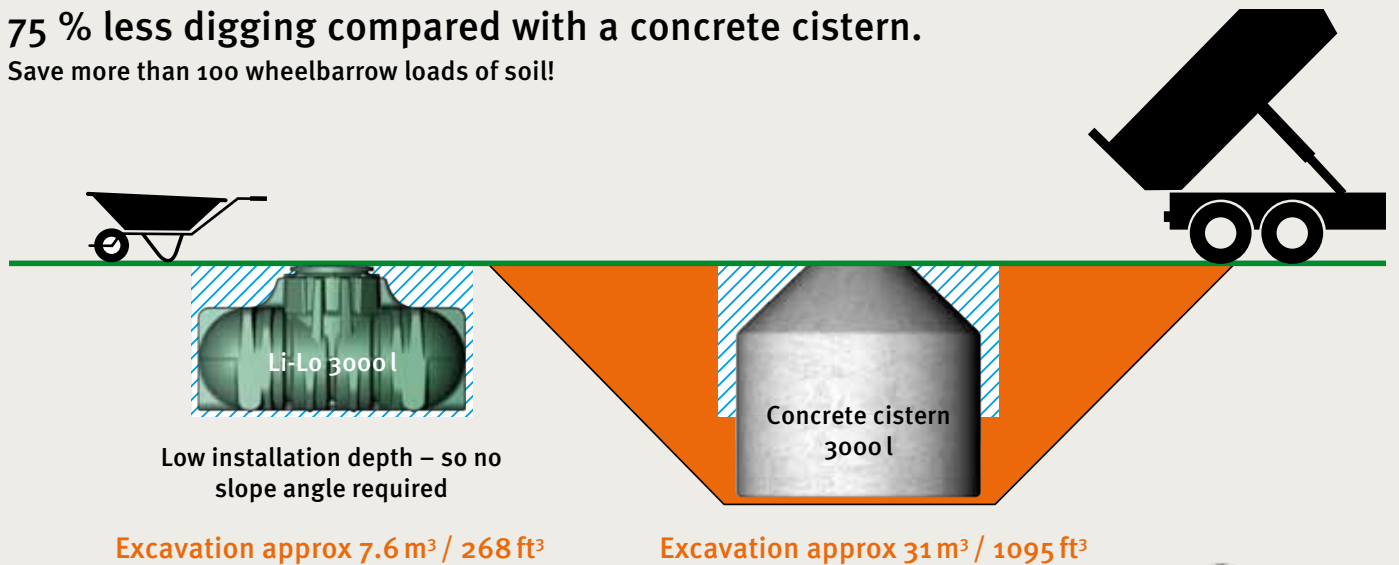



## *The perfect solution*

- ✓ State of the art rain water harvesting technology
- ✓ Amazing German engineered underground tank system
- ✓ Stunning technology with self cleaning filter
- ✓ Simple to install – very low maintenance



## Technical data

Measurements/weights	1500 l 450 US-Gal	3000 l 800 US-Gal	5000 l 1350 US-Gal
<b>Order Code</b>	200050	200051	200052
Length [l]	2100 mm (82,6")	2450 mm (49,2")	2890 mm (113,77")
Width [w]	1250 mm (49,2")	2100 mm (82,67")	2300 mm (90,55")
Height of tank shoulder [h]	700 mm (27,5")	735 mm (28,9")	950 mm (37,4")
Height of dome collar [hd]	315 mm (12,4")	315 mm (12,4")	315 mm (12,4")
Ø inlet [e]	650 mm (25,96")	650 mm (25,96")	650 mm (25,96")
Ø tank dome [d]	800 mm (31,49")	800 mm (31,49")	800 mm (31,49")
Weight approx.	80 kg	170 kg	240 kg
Pounds/lbS	176,36	374,77	529,1

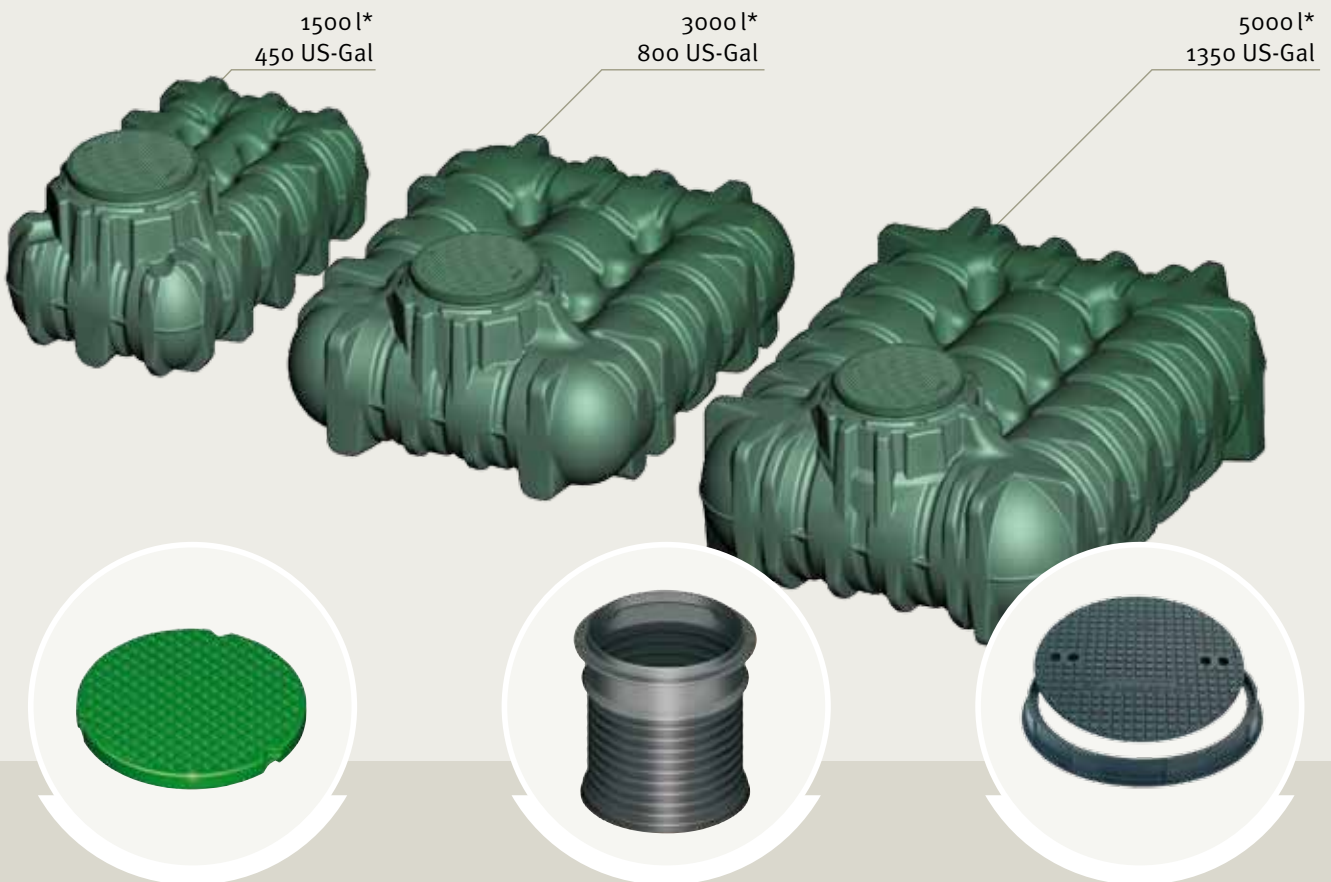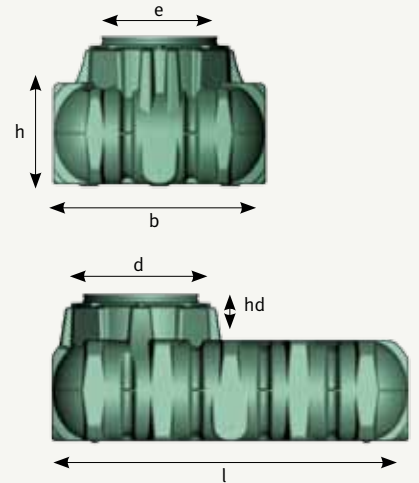

**\*Includes PE lid:**  
**PE lid double-walled**  
 with childproof lock  
 Colour: grass green  
 Ø 70 cm.

**Accessory:**  
**The perfect tank covering**  
 The standard Li-Lo telescopic dome shaft  
 can be telescoped and shortened in a  
 continuously variable manner. Ø 60 cm,  
 adjustable from 22-55 cm.  
**Order no. 202057**

**Accessory:**  
**Car module**  
 Class B125/DIN EN 124 (in combination  
 with Li-Lo telescopic dome shaft),  
 consisting of cast cover with a Ø of 69 cm  
 and cast frame with a Ø of 78 cm.  
**Order no. 202059**



# The Li-Lo flat underground tank

## Waste water applications

### Accessories for collection tank

#### Ventilation head

DN 100, so that the air can escape when the collection tank is being filled

Best.-Nr. 104018



#### Odourfilter for ventilation shaft

DN 100 Reliably filters unpleasant odours

Best.-Nr. 104018




#### Overflow monitor

emits a visual and acoustic signal to indicate that the max. level will soon be reached. Sensor part sits in the tank, battery-operated, 6V, AA battery, (not in scope of supply); 20 m cable


Best.-Nr. 104009



## Rainwater Harvesting

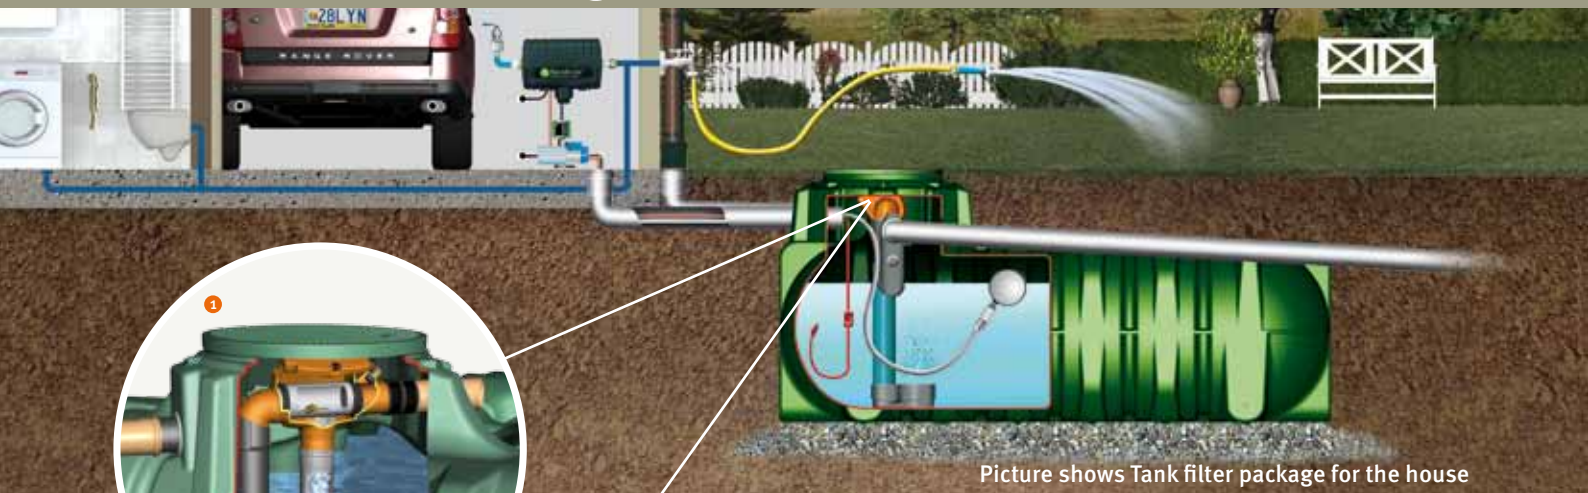


Picture shows Tank filter package for the house

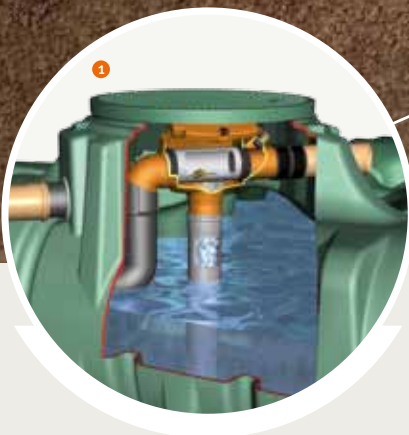

#### 1 Tank filter package for the house

##### Scope of supply:

- Underground tank Li-Lo
- Telescopic dome shaft Li-Lo (optional)
- Child-proof PE lid double-walled
- Filter package with SUPRA filter
- Drinking water intake with digital level indicator
- Domestic waterworks with dry running protection, max. 4.8 bar, max. 4800 l/h
- Pump wall console
- Floating extraction
- 10 m suction hose 1"

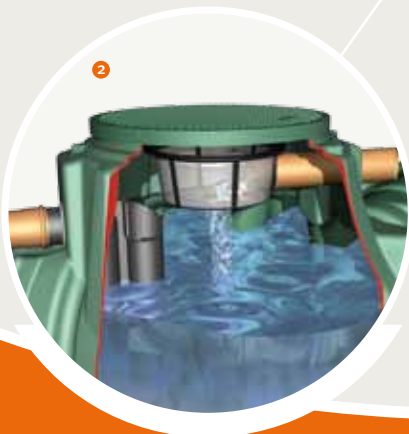

#### 2 Tank filter package for the garden

##### Scope of supply:

- Underground tank Li-Lo
- Telescopic dome shaft Li-Lo (optional)
- Child-proof PE lid double-walled
- Filter strainer for hanging in the tank
- Combi-Tauch 1000 submersible pump
- Perfecta water connection box incl. 2-way valve for standard hose coupling
- 10 m pressure hose 1"

Recommended by: